


PRODUCT SPECIFICATION SHEET

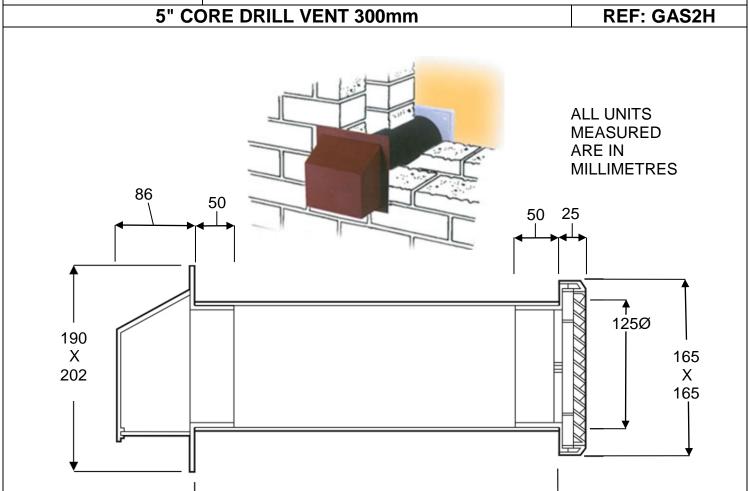

General

Supplies high levels of combustion/cooling air for heating appliances, a draught resistant cowl is fitted on this product, comes with a free Area Reducer disk, 50mm long spigot and large flanges for an 'Easyfit' and also allows an 80mm adjustment range, there is a removable internal inspection/directional louvre. Keyed surfaces permitting subsequent painting if required.

300 X 380

Details

Dotano			
REF	GAS2H	MANUFACTURING PROCESS	Injection moulded
BOX SIZE (MM)	430 X 215 X 200	MATERIAL	
PALLET SIZE (M)	1 X 1.2 X 2.25		HIPS – High Impact Polystyrene
FREE AREA	100cm²		Till o Tilgit impact i olystyrene
KW AREA	27kW		
PACKING	Product per box = 1, Boxes per pallet = 130	COLOUR	External Cowl – BROWN, TERRACOTTA, BUFF.
WEIGHT	Product = 724g, Box = 933g, Pallet = 150kg		Internal Louvre – WHITE

References

• BS5440 Pt.2:2000

Version 1.0 27/06/2016 DRN BY T.S.HUISH DRG No. GAS2H-01

Airflow(Nicoll Ventilators) Limited, Unit 15 Queensway, Stem Lane Industrial Estate, New Milton, Hampshire, BH25 5NN Telephone: 01425 611547 FAX:01425 638912 e-mail:sales@airflow-vent.co.uk Made in the UK

Due to continuous development Airflow (Nicoll Ventilators) Limited reserves the right to amend the specification without notice.