




ALL UNITS
MEASURED
ARE IN
MILLIMETRES

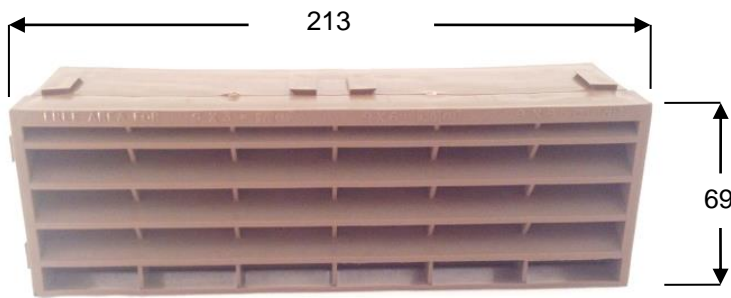


20mm deep by
43° louvers

Weep outlet

Strength bar

Water barriers

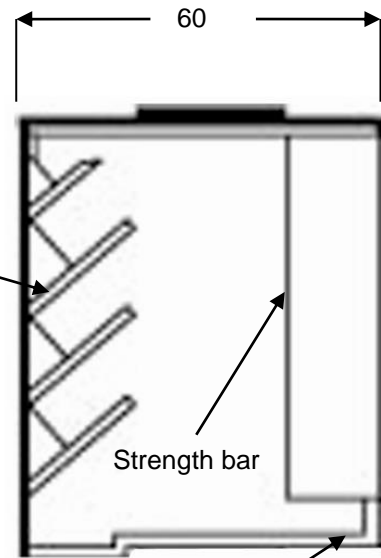

General

Whilst exceeding current BS Standards, our interlocking airbrick has been designed for a wide range of ventilation applications. It has 20mm deep louvers set at 43° act as excellent barriers against driving rain. A two-step integral water barrier has also been incorporated for added peace of mind. All airbricks are supplied with mortar key and keyed surface permitting painting, if required. A fly screen option is also available with the unique ability to maintain free area whilst obstructing particles of 4mm diameter or more.

This product is used in conjunction with, AIR9202, AIR9203, AIR960, TELL93, TELL96, TEL99, DB CENTURION.

Details

REF	AIR920	MANUFACTURING PROCESS	Injection moulded
BOX SIZE (MM)	380 X 230 X 260	MATERIAL	PPC - Polypropylene copolymer
PALLET SIZE (M)	1 X 1.2 X 1.9		
FREE AREA	78cm ²		
PACKING	Product per box = 20, Boxes per pallet = 91		
WEIGHT	Product = 120g, Box = 2.569kg, pallet = 260kg	COLOUR	Black, Brown, Buff, Terracotta, Light Grey

References

- **BRE: DIGEST 17/262**
- **BRE: Floors, Flooring**
- **DOE: Building Regulations C4**
- **NHBC: Standards 5.2**
- **BS:493**

Version 1.0

14/03/2016

DRN BY T.S.HUIISH

DRG No. AIR920-3

Airflow(Nicol Ventilators) Limited, Unit 15 Queensway, Stem Lane Industrial Estate, New Milton, Hampshire, BH25 5NN
Telephone: 01425 611547 FAX:01425 638912 e-mail:sales@airflow-vent.co.uk

Made in the UK

Due to continuous development Airflow (Nicol Ventilators) Limited reserves the right to amend the specification without notice.